SNOWFAN

DC-B类轴流风扇

40×40×10MM SERIES

轴承结构：滚珠和含油结构
Bearing system: Ball or Sleeve
外框材质：环保防火PBT UL 94V-0
Frame: Thermoplastic PBT UL 94V-0
扇叶材质：环保防火PBT UL 94V-0
Impeller: Thermoplastic PBT UL 94V-0
风扇单重：14.1g (Weight: 14.1g)

E341576

P&Q曲线(在额定电压下) P&Q CURVE (AT RATEDVOLTAGE)

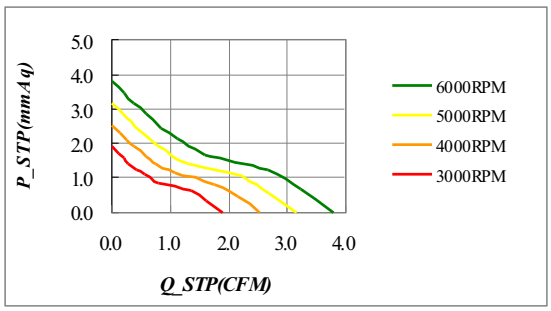

尺寸图 DIMENSIONS DRAWING

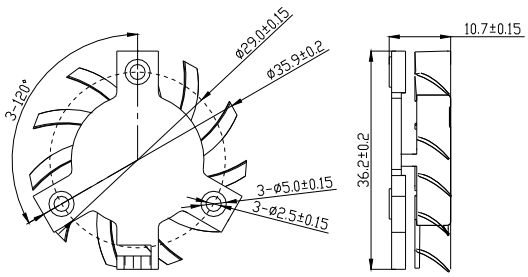

马达可选功能列表 (Available Functions)

1.马达保护 (Motor protection)

RP	SS	LP	CL	OVP
●	●	●	○	○

2.信号输出 (Signal out put)

FG	RD	RDB	LD
●	●	○	○

3.调速方式 (Speed control mode)

PWM	TC	VC	CC	CS
●	○	○	○	○

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型 号	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪 音
PART NO.	VDC	VDC	Amp	Watt	R.P.M	m^3/min	CFM	mmH2O	INH2O	DB-A
YY4010L05	5	3.6to6.8	0.07	0.35	3000	0.05	1.9	1.92	0.08	18
YY4010L12	12	7.0to13.5	0.03	0.36						
YY4010L24	24	18to26.5	0.02	0.48						
YY4010M05	5	3.6to6.8	0.15	0.75	4000	0.07	2.53	2.56	0.1	22
YY4010M12	12	7.0to13.5	0.06	0.72						
YY4010M24	24	18to26.5	0.03	0.72						
YY4010H05	5	3.6to6.8	0.25	1.25	5000	0.09	3.16	3.2	0.13	27
YY4010H12	12	7.0to13.5	0.1	1.2						
YY4010H24	24	18to26.5	0.05	1.20						
YY4010H05-HH	5	3.6to6.8	0.45	2.25	6000	0.11	3.8	3.84	0.15	31
YY4010H12-HH	12	7.0to13.5	0.18	2.16						
YY4010H24-HH	24	18to26.5	0.09	2.16						

■ 如果您需要的转速或电压或功能不在这清单上，请与我们业务联系。 If you want another rpm or voltage or functions which one in the list. please contact with our sales.

■ 提示1：功能的具体信息参照产品目录前页篇章。
Notes 1 : The catalog have detail information in the front page for the functions.

■ 提示2：产品详细信息请参照承认书。
Notes 2 : Product have a detail in the approval sheet.

■ 提示3：产品规格变更不另行通知。
Notes 3 :Specifications are subject to change without notice.